

**Family**  
COOKING EQUIPMENT STAR 90

**Section**  
GAS AND ELECTRIC PASTA COOKERS

**Model**  
NPC98G

**Code**  
CR0590810

### 42+42 LITRE TWO WELL GAS PASTA COOKER

Gas pasta cooker with two wells constructed in AISI 304 stainless steel. 2 mm thick pressed top with spillage recess and extended expansion zone. Deep drawn wells in AISI 316 polished stainless steel with radiused bottom for ease of cleaning. Water loading by means of solenoid valve activated by switch on control panel. Fast filling and top-up options. Safety guaranteed by a pressure switch, which prevents heating if well is empty. Fixed water tap in stainless steel located below draining board. Heating by means of steel burner with stabilized flame complete with pilot flame and safety thermocouple. Gas supply controlled by safety valve with thermocouple, electric automatic ignition. Precise heating control by means of energy regulator. Activation of heating signalled by an indicator led on the control panel. 42+42-litre well capacity. Well dimensions mm 305x510x285h. Drain taps on bottom of well, accessible from front doors. Height adjustable feet in stainless steel. IPX5 protection rating.



#### Technical data

Width mm:	800	Internal dim. oven mm:	
Depth mm:	900	Oven capacity:	
Height mm:	870	Oven power kW:	
Weight kg.:	89.00	Qty heating zones:	2 x 14 kW
Volume m <sup>3</sup> :	1.00	Plate dim. mm:	
Power supply:	VAC230 50Hz	Dim. heating zone mm:	
Gas power kW:	28.00	Qty tank:	2
Electric power kW:	0.20	Tank dim. mm:	305x510x285h
		Tank capacity l:	42 + 42


**Family**  
COOKING EQUIPMENT STAR 90

**Section**  
GAS AND ELECTRIC PASTA COOKERS

**Model**  
NPC98G

**Code**  
CR0590810

**42+42 LITRE TWO WELL GAS PASTA COOKER**

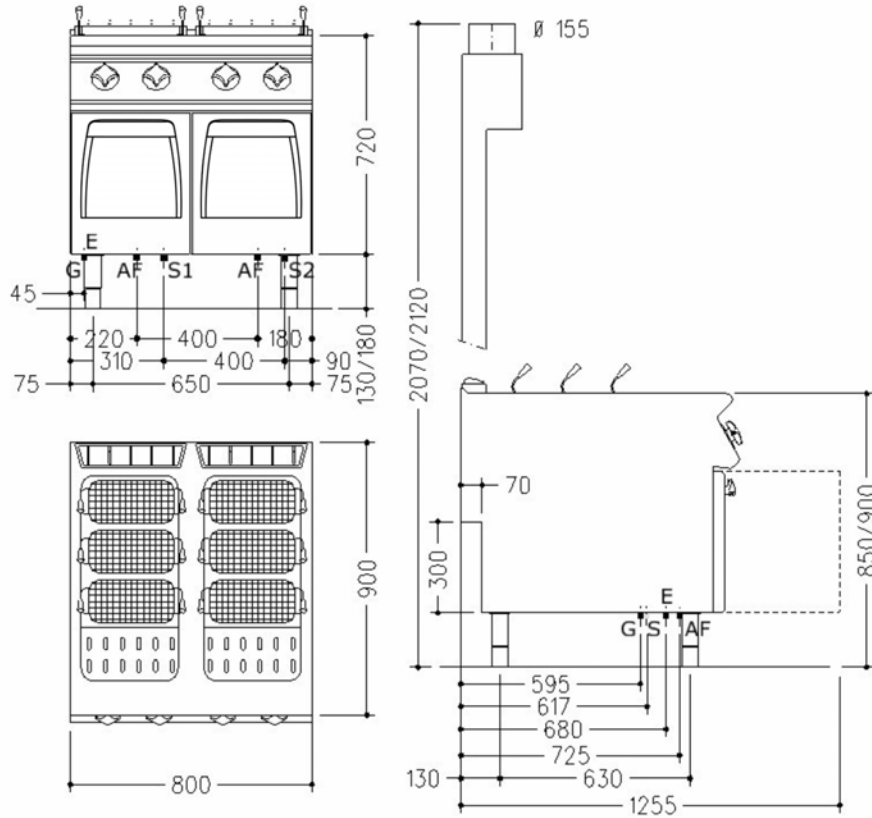

**Legend**

(E) Socket 1: Connection supply terminal floor level (+100mm). Spare cable 1500mm

(E) Socket 2:

(G) Gas: Ø1/2"- H=200mm

(AD) Softened water:

(AF) Cold water: Ø1/2"-H=200mm

(AC) Hot water:

(S) Draining: Ø1"-H=200mm

(FR) In e out freon:

(V) Steam: