


## Features

- ❖ User friendly 'soft touch' LED membrane control panel
- ❖ Uninterrupted loading
- ❖ Pass through mode provided
- ❖ Smooth and parallel manual width adjustment
- ❖ Small machine footprint
- ❖ SMEMA compatible

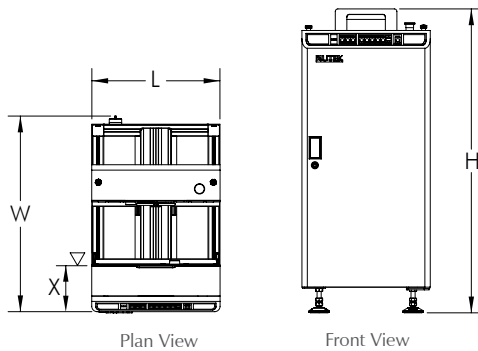

Legend  
△ : Fixed Point

SPECIFICATIONS	
<b>Description</b>	This unit is used for loading of bare PCBs to the production line.
<b>Maximum PCBs Height</b>	200 mm or 20 kg max.
<b>Cycle Time</b>	Average 5 seconds
<b>Power Source</b>	100, 230VAC 1Ph
<b>Power Consumption</b>	100VA max.
<b>Air Pressure</b>	4 - 6 bar
<b>Air Consumption</b>	5 ltr/min. max.
<b>PCB Thickness</b>	0.6 - 4 mm

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTE1200-M	500 x 810 x 1185	180 mm	80 kg
L	NTE1200-L	500 x 810 x 1185	180 mm	80 kg