




* Tower light (optional)

Features

- ❖ User friendly 'soft touch' LED membrane control panel
- ❖ First In First Out (FIFO), Last In First Out (LIFO) and pass through operating modes
- ❖ Flexible repositioning of 'fingers' (support bars) to accommodate jagged edge PCBs
- ❖ Durable rollers as conveying medium (no replacement of belts needed)
- ❖ **Fast, smooth and precise indexing (frequency inverter controller)**
- ❖ Threshold system provided
- ❖ Smooth and parallel width adjustment (leadscrew)
- ❖ Small machine footprint
- ❖ SMEMA compatible

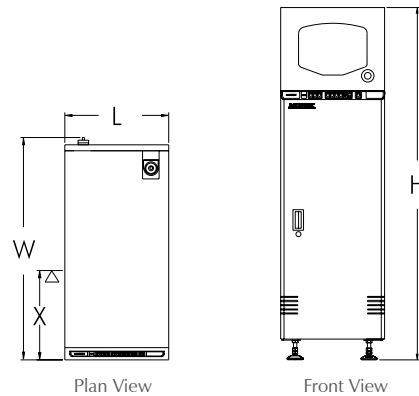

SPECIFICATIONS	
Description	This unit is used as a buffer between SMD machines.
Maximum PCBs Capacity	26 pcs or specify
Maximum Load	2 kg/PCB
Cycle Time	Average 15 seconds
Indexing Pitch	20 mm or specify
Power Source	100, 230VAC 1Ph
Power Consumption	350VA max.
Air Pressure	4 - 6 bar
Air Consumption	2 ltr/min. max.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM1400-M	500 x 980 x 1700	425 mm	210 kg
L	NTM1400-L	653 x 1080 x 1700	425 mm	240 kg